



## FGO

### LTE/Multiband High Gain Omni Antenna

#### Features

- ◆ High Gain Omni Antenna
- ◆ Covers LTE/4G, 3G, GSM and cellular bands
- ◆ Ideal for fringe network areas
- ◆ Supplied with Mount Bracket

#### Specifications

Frequency range	690-960 / 1710-2170 / 2500-2700 MHz
Peak Gain	5 dBi
Polarisation	Linear
Impedance	50 Ohm
VSWR	<2.0:1
Power rating	10W
Operating Temp.	-40 to +70 degrees C
Cable / Connector	No cable, N-Female connector
Dimensions	390 x 32mm (hxd) excluding bracket

#### Popular Ordering Options

FFGO35342-NF-XX	FGO Omni antenna with N-Female Connector
-----------------	--

Specifications subject to change without notice.


5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK

Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: sales@ead-ltd.com  
Web: www.ead-ltd.com




## FGO| LTE Multiband High Gain Omni Antenna

### VSWR

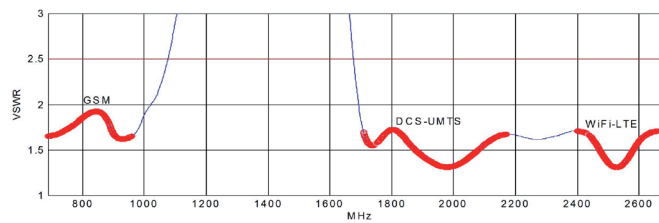

### Outline Drawing

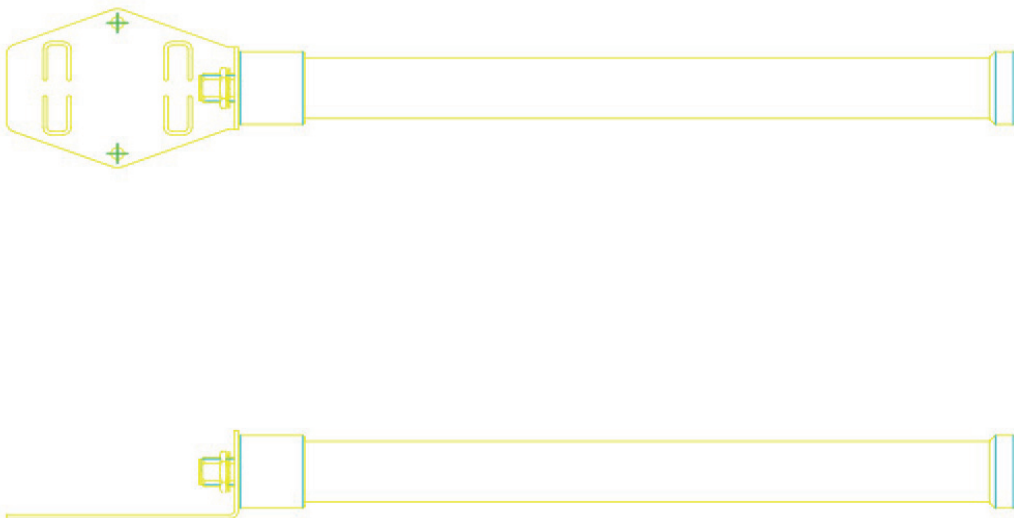

Specifications subject to change without notice.

5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK

Tel: **REweb** S.r.l  
Fax: C.F e P.IVA 02026760351  
Email: Via Cipriani 2 - 42124 Reggio Emilia  
Web: Tel. 0522 420786 - Fax. 0522 420768  
Email: marketing@reweb.it

**EAD**  
embedded antenna design ltd  
*Delivering Antenna Innovation*